




85600A—Aerotech LED Strobe


Specification Sheet

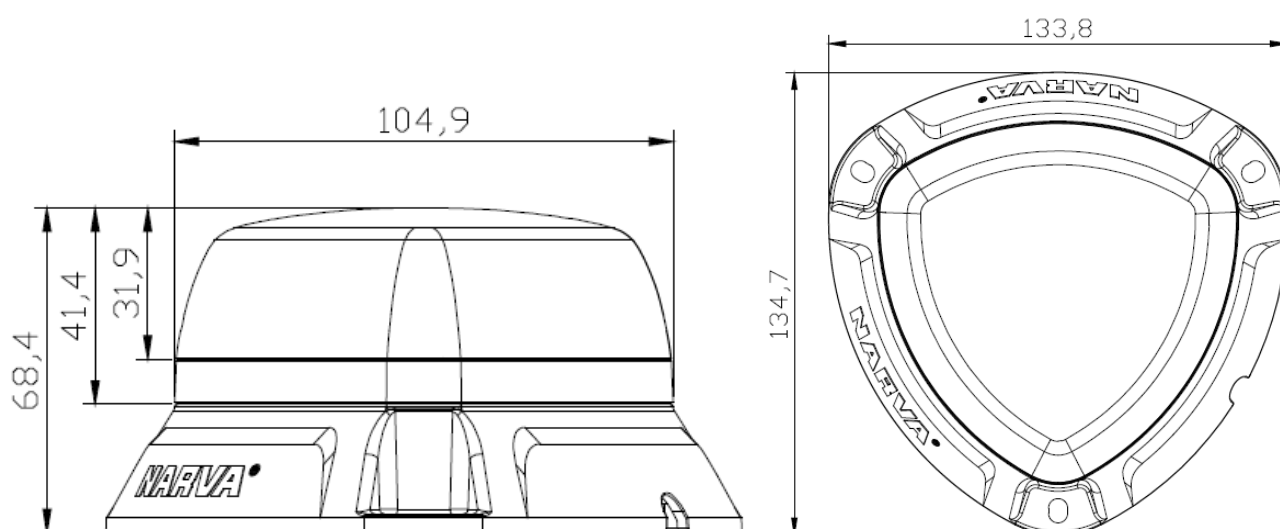

Technical Specifications:

Height	60mm
Lens Colour	Amber
Output Colour	Amber
Lens Material	Makrolon 2607 Polycarbonate
Housing Material	Polycarbonate
Weight	330g
Input voltage	10-33V
LED's	9 x 5W
Current Draw (rotate, flash)	0.6A, 1.4A @ 12V
SAE	J845 Class1, W3-1
ECE R65	N/A Use 85600A-65
ECE R10	10R-06.22672
CISPR25	Class 3
ROHS	✓ - LCS210316139AR
REACH	✓ - LCS210316138AR
IP Rating	IP67
Operating Temperature	-30° — +60°
Vibration tests	IEC 60068-2-64
Mechanical Shock Test	ISO 16750-3:2007 4.2.2
Night Mode Percentage	40%
Adapter Plate	Not included 85393

Bolt holes the same as any ø130mm beacon/strobe

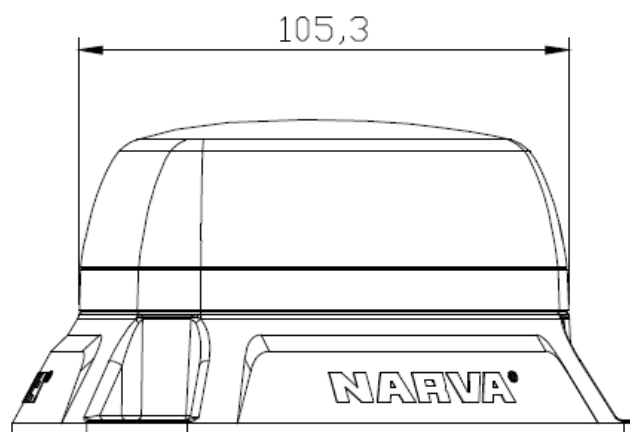

Wiring Diagram:

Red—Positive DC

Black—Ground/negative

Grey—Manual high/low mode

Yellow—Pattern change

White—Synchronise

Flash Patterns

The unit comes with 4 user-selectable flash patterns plus steady on



Distributed by Brown and Watson International

1500 Ferntree Gully Road, Knoxfield, 3180

P.) 1800 422 422